


FEATURES

- 16*10/100Mbps PoE ports, 2*10/100/1000Mbps uplink port, 1*1000Mbps SFP Slot
- Support IEEE802.3af/at
- Support restrain network storm, VLAN function
- Support Max Transmission distance up to 250m with PoE Power
- Support AI self-healing mode (Watchdog function)
- The toggle horse can be switched at will without power
- All port supported by MDI/MDIX auto flip and self-negotiation
- Built-in power supply;
- Maximum power of single PoE port: 30 W
- Maximum PoE power: 250W/300W
- Adopts store-and-forward architecture
- Fanless, natural cooling, small,compact and quiet design, suitable for desktop or wall
- Support lightning protection 6kV

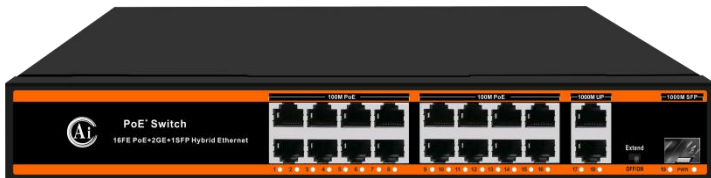

MOBITECH®The 16-port 10/100Mbps AI PoE switch provides seamless data connectivity for 10/100Mbps Ethernet and PoE power for powered devices such as network surveillance cameras and wireless (AP).

The switch has 16* 10/100Mbps PoE+ ports + 2* 100/1000Mbps uplink ports+ 1 Gigabit SFP ports, where 1-16 100 Mbps downlink power ports all support powering PoE network cameras via UTP Category 5 and above unshielded twisted pair cables. 16 10/100 Mbps adaptive RJ45 downlink ports all support 802.3af/at standard PoE power supply. Support priority mechanism, when the remaining power is insufficient, the power supply of the high priority port is guaranteed first to avoid overloading the equipment. The maximum PoE output power of the whole machine is 250W/300W, and the maximum power supply power of individual ports is 30W.

The 16 ports of Power over Ethernet can achieve AI self-healing function (watchdog function) by toggling any dial horse switch in the case of non-stop power, 250m long distance + VLAN isolation mode , which automatically detects the data communication status in real time. When a port communication fault occurs, the corresponding port restarts automatically to recover the network communication and avoid manual maintenance.The Value lies in help to build the AI intelligent security transmission ecosystem.


Users can easily understand the working status of the device through the power indicator and status indicator of each port, plug-and-play, no configuration required, simple and convenient.

Specifications

Model	MB-SP1606K1S		
Fixed Port	16*10/100Base-TX PoE ports (Data/Power) 2*10/100/1000Base-TX uplink RJ45 port (Data) 1*1000Mbps SFP Slot		
Ethernet Port	Port 1-16 support 10/100Base-T(X) auto-sensing, full/half duplex MDI/MDI-X self-adaption		
Network Connector	Network Port	PoE Ethernet Port	1~16 Port : 10/100Mbps
		Ethernet port	Uplink Port : 10/100/1000Mbps
		Watchdog	1~16 port
	Transmission Distance	1~16 Port :	
		100Mbps:0~100m; 10Mbps: 0~250m; Uplink Port : 0 ~ 100m	
Transmission Medium	Cat5/5e/6 standard network cable		
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3ab 1000Base-T; IEEE802.3z 1000Base-X; IEEE802.3x		
Forwarding Mode	Store and Forward(Full Wire Speed)		
Switching Capacity	9.2Gbps		
Forwarding Rate@64byte	6,8448Mpps		
MAC	8K		
Buffer Memory	4M		

Twisted pair Transmission	10BASE-T : Cat3,4,5 UTP(≤250 meter) 100BASE-TX : Cat5 or later UTP(≤100 meter)
PoE Port	Port 1 to 16 IEEE802.3af/at @ POE
Power Supply Pin	Default 1/2 (+), 3/6 (-), optional 4/5(+), 7/8(-)
Single-port Max Power	30W, IEEE802.3af/at
Total PWR/ Input Voltage	250W/300W (52VDC)
Power Supply	External power adapter,AC100~240V 50-60Hz 1A
Power Consumption	Standby<4W, Full load<300W
Operation TEMP/Humidity	-20°C+55°C, 5%~90% RH Non condensing
Storage TEMP/Humidity	-40°C+75°C, 5%~95% RH Non condensing
Dimension (L*W*H)	310mm*183mm*45mm
Weight	2.06kg
Installation	Desktop.Wall-mounted

Application

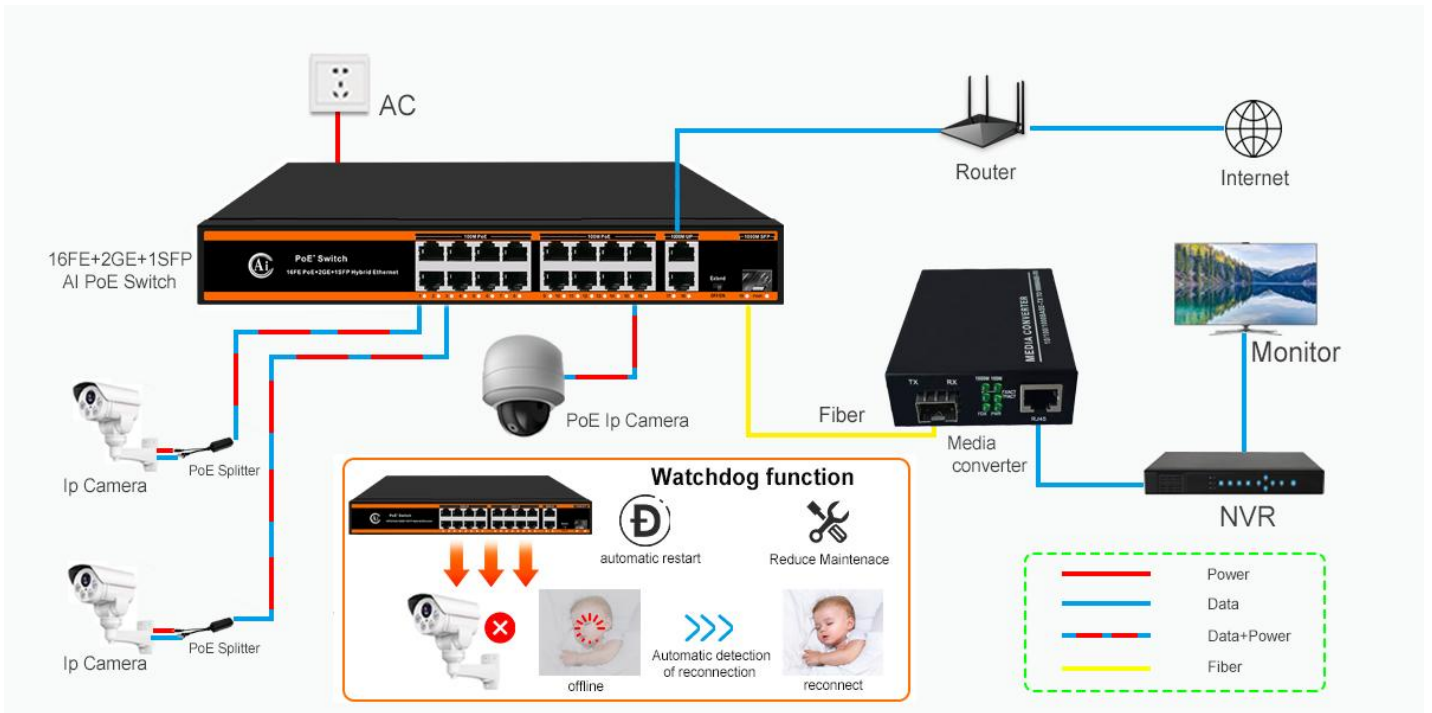

Order Information

Part No	Description of product	Unit
MB-SP1606K1S	19 ports switch with 16*10/100M bit PoE ports,2*10/100/1000M Uplink Port,1*1000Mbps SFP Slot,PoE Standard: IEEE 802.3af/at,PoE data & power transmission distance 100meters(100Mbps),250meters(10Mbps) ,1-16PORT support Watchdog function	pc